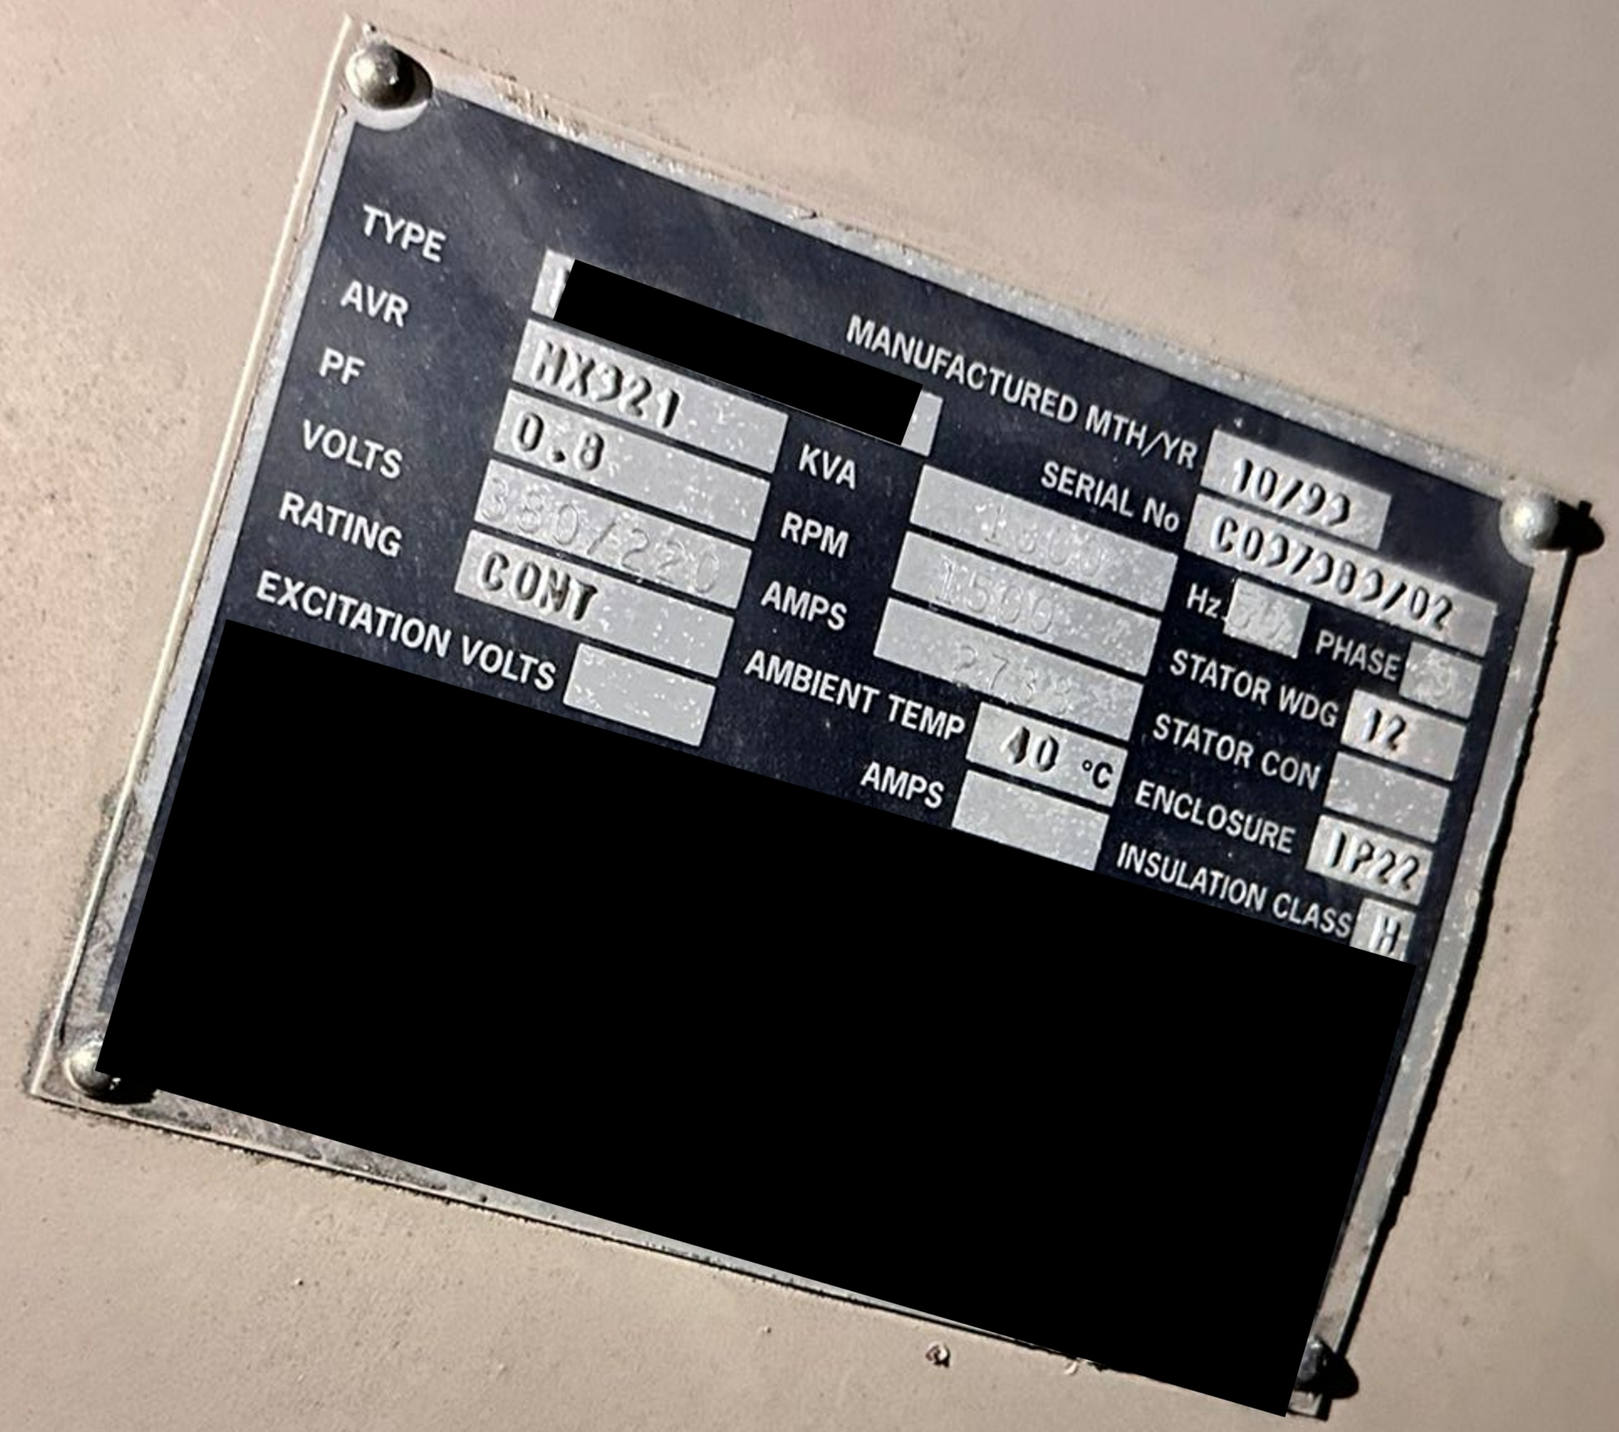
TYPE
AVR
PF
VOLTS
RATING
EXCITATION VOLTS
HX321
0.8
CONT
KVA
RPM
AMPS
AMBIENT TEMP
40 °C
AMPS
MANUFACTURED MTH/YR
10/93
SERIAL No
Hz
PHASE
STATOR WDG
12
STATOR CON
ENCLOSURE
IP22
INSULATION CLASS
H